


Slack Cable Switch (SCS)

Technical data

FEATURES

- ▶ Cross-circuit monitoring with a resistor
- ▶ Positive break contact
- ▶ Freely accessible cable adjustment screw
- ▶ Switch function testable in assembled state
- ▶ Suitable for doors up to 700 kg
- ▶ Slack cable switch acc. to EN 12453-201+A1:2021
- ▶ Cat. 2 / PL "c" acc. to EN ISO 13849-1
- ▶ Cable tension discernable in closed state

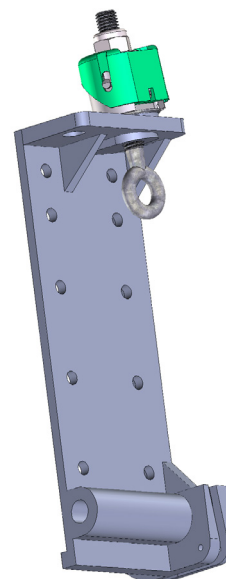

MECHANICAL

Dimensions (l × w × h)	40 × 36 × 42 mm
Housing material	ABS
Max. doorweight	700 kg*
Enclosure rating	IP67

ELECTRICAL

Supply voltage U_{sp}	10 ... 30 VAC / DC
Max. current consumption	5 mA
Resistor value	1.5 kΩ or 8.2 kΩ

* For installation with bottom bracket as shown

GENERAL

RoHS	2011/65/EU
Certificate	CE, UKCA


CONNECTION CABLE AND ELECTRICAL CONNECTION

Connection	Fix cable
Length - connection cable	0.5 m up to 20 m depending on item
Diameter	Ø 3 mm
Material	PVC
Wires	AWG 26 (black/black)



CEDES AG is certified according to ISO 9001: 2015.

Dimensions

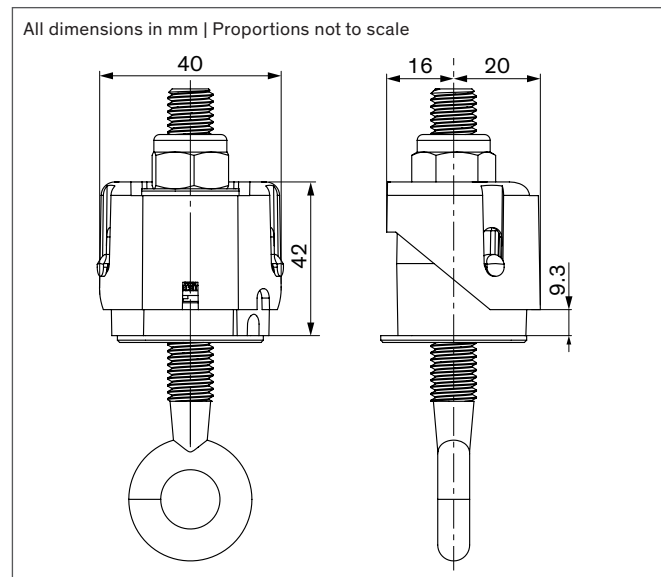

Application

