



Overview

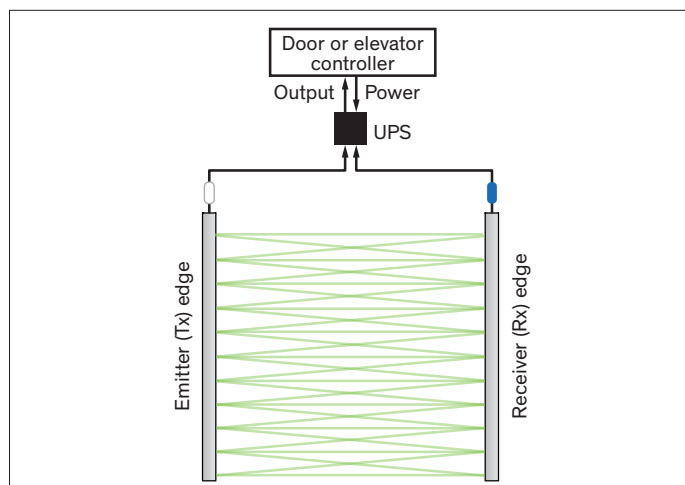

LED description








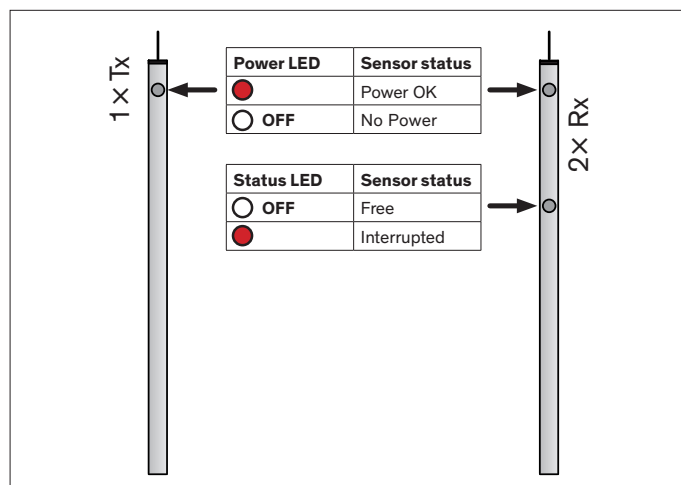


Installation




Important:

- ▶ Switch off main power and mark application „Out of service“.
- ▶ Follow all applicable safety measures.
- ▶ Make sure that your installation complies with all applicable regulations and safety measures.

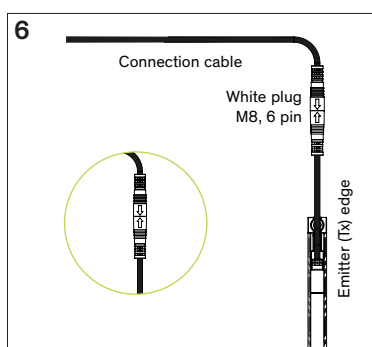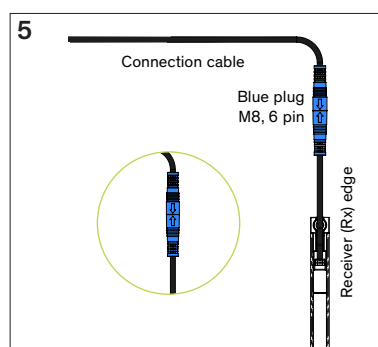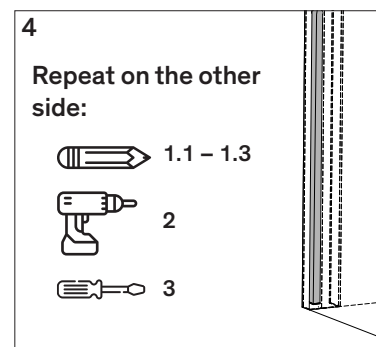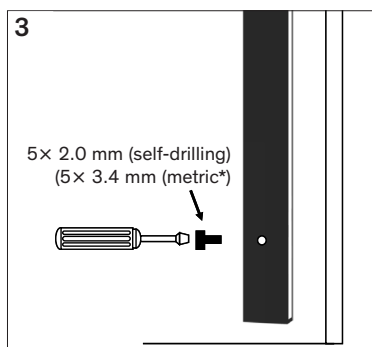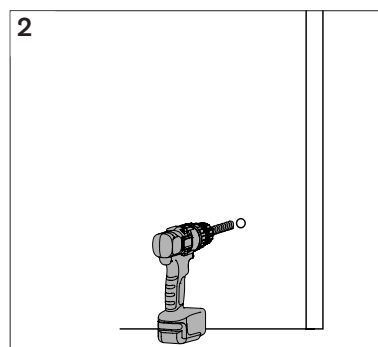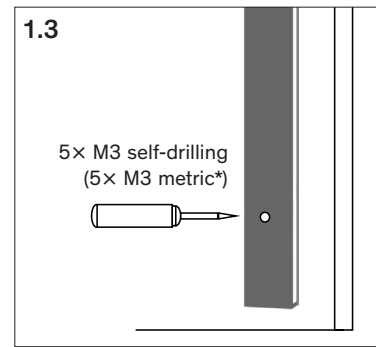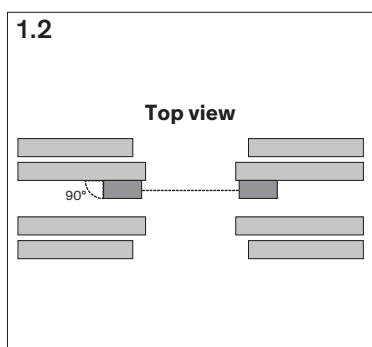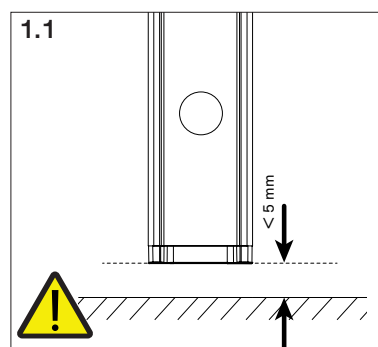


* = Different variants have different installation holes and mounting kits


Mechanical integration

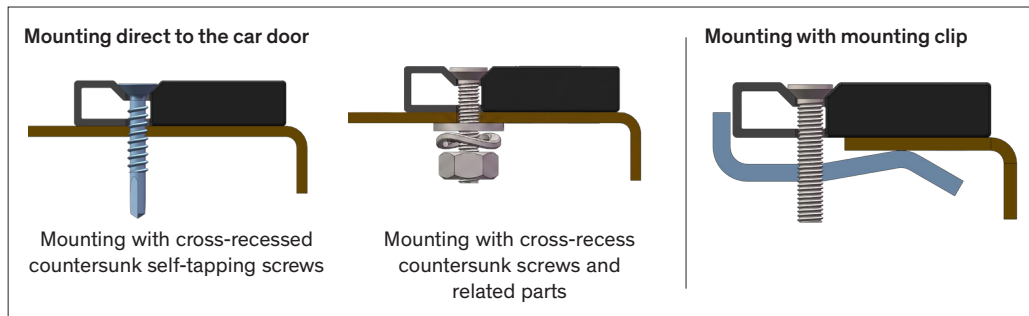


Detailed view

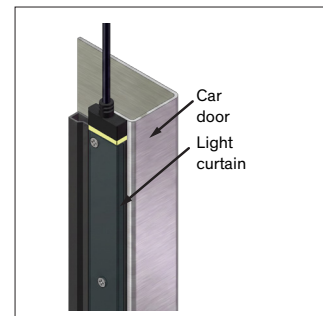

Mounting conditions

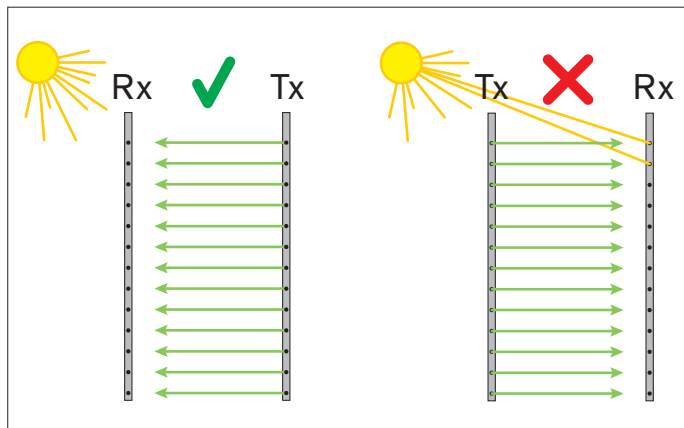


- Although the easygard is insensitive to direct sunlight, avoid all unnecessary exposure if possible, most especially to the receiver.

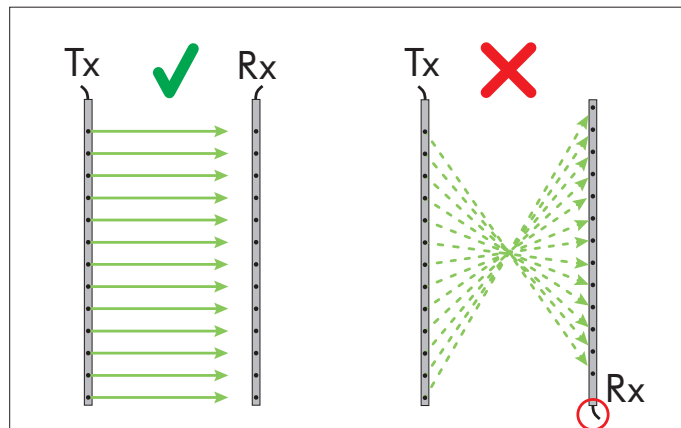


- Make sure to place the connection plugs for both the emitter and receiver at the same end.

Wiring (with UPS | Mod Package)

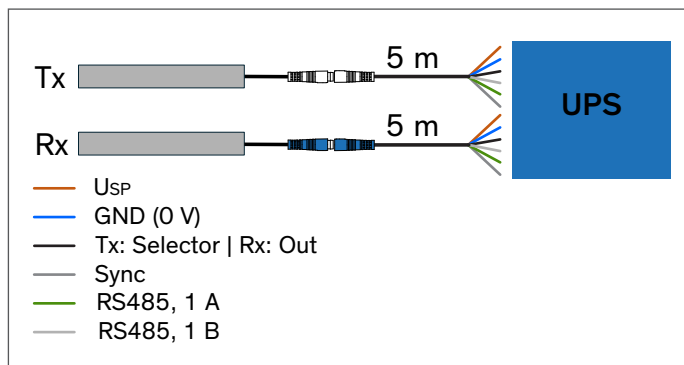

Wiring (without UPS)

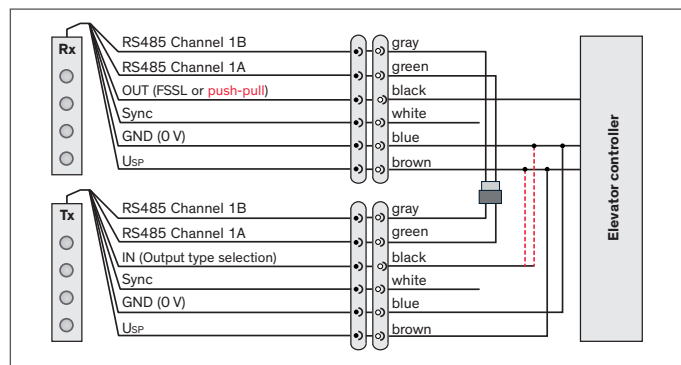

Contents of delivery

Pos.	Description	Qty
1	Light curtain system (emitter Tx and receiver Rx edge)	1
2	Connection cable Tx, 5 m, M8, 6-pin, open & Sync	1
3	Connection cable Rx, 5 m, M8, 6-pin, open & Sync	1
5	Universal Power Supply - UPS	1
6	Mounting kit - consisting of:	
	- Mounting clips	10
	- M3 × 19 cross-recess countersunk self-drilling screws	10
	- M3 × 16 cross-recess countersunk screws	10
	- M3 flat washers	10
	- M3 spring washers	10
	- M3 nuts, 0.5 mm pitch	10

PLEASE NOTE:

Position 5 is included in the contents of delivery only if the cegard/Smart 6 or 6l Mod Package is ordered.