


## Accessories

### ENS-S 8200



#### General Data

|                                      |  |
|--------------------------------------|--|
| Operating condition - door open      | 0 Ω (contact closed)                                   |
| Operating condition - door closed    | 8k2 Ω  |
| Operating condition - internal fault | ∞  |
| Safety properties                    | DIN EN 12453:2017-11 and<br>DIN EN ISO 13849-1:2016-06 |
| Protection level                     | IP 68  |
| Operating temperature                | -15°C to +65°C   |
| Voltage range                        | 24 VAC/DC  |
| Contact load capacity                | max. 0.12 VA   |
| Max. current                         | 5 mA   |
| Max. switching distance              | 4 mm   |
| Installation diameter                | 13,5 mm  |
| Fitting depth                        | 15 mm (magnet), 25 mm (switch)                         |
| Faceplate size                       | 18.5 x 37.5 x 3 mm (H x W x D)                         |
| Mounting                             | Each part 2 x M4 flat head screw                       |
| Cable length                         | 5 m  |
| Housing colour                       | Grey   |

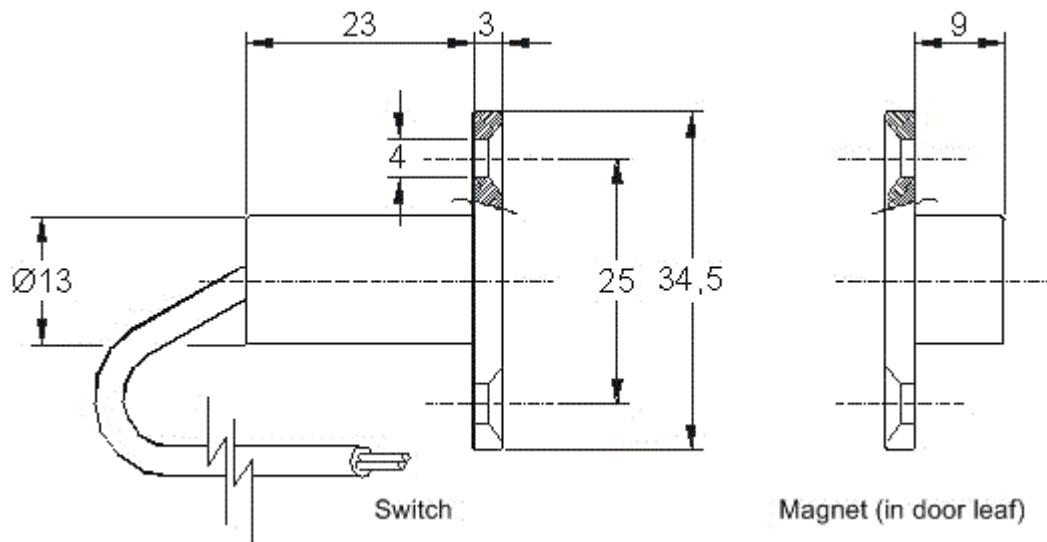

## Contact



CEDES AG  
[sales@cedes.com](mailto:sales@cedes.com)

All dimension in [inch] mm. This drawing and the information contained is for general presentation purposes only. Please refer to the "Download" section for detailed technical drawings. © CEDES AG. All rights reserved. We do not assume responsibility for technical inaccuracies or omissions. Specifications are subject to change without notice.